





Quick Start Guide

Wireless barcode scanner

Item list:

- 1 x Barcode scanner
- 1 x USB cable
- 1 x Charging base
- 1 x Quick start guide
- 1 x 2.4G wireless dongle (attached to the dongle port)
- 2 x Plastic card (For 2D scanner only)

Scanner Appearance

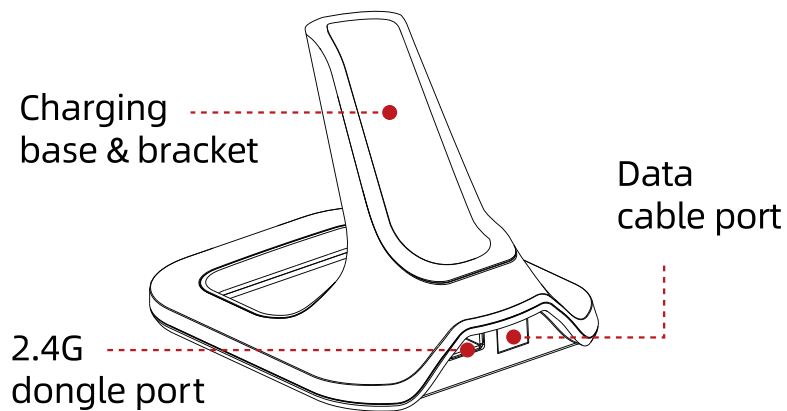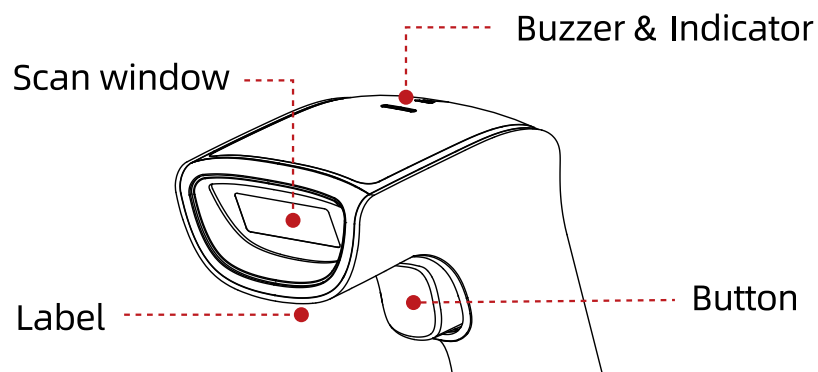

Note: The appearance of the scanner is subject to the actual scanner.

How to use ?

The scanner can work as two modes :

- ① 2.4G Wireless mode ② Bluetooth mode

It is default set as 2.4G Wireless mode.


Mode 1st : 2.4G Wireless mode

Simply connect the stand to your PC or other device (keep the dongle connected to the stand), then the read data will output directly in your terminal device, it's plug and play.

*If the scanner is on Bluetooth Mode, scan below setting code to change to 2.4G Mode.



2.4G
Wireless mode

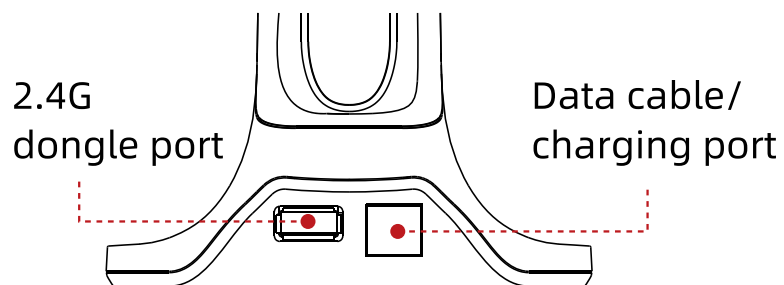

Mode 2nd : Bluetooth mode

- 1 To change the 2.4G mode to Bluetooth mode, please scan the below setting code :




Bluetooth HID Mode

* If the scanner has been connected before, it will be paired automatically here, otherwise go to below step.

- 2 Pair the scanner RT332 HID with your Bluetooth device.

* After scanning the Bluetooth HID mode code, if your Bluetooth device can't find the scanner, scan below setting code to find it and pair it.

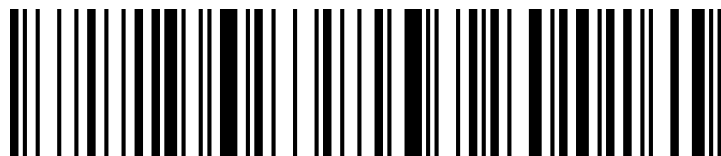

Pairing

Factory default



Restore Factory Setting (* factory default items)

Inventory mode



Synchronous Mode*




Storage Mode



Upload All Data



Numbers of Data Uploaded

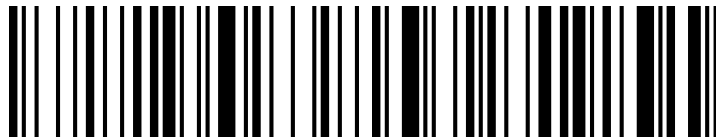

Clear All Data

IOS HID virtual keyboard

When using Bluetooth HID mode to connect to the IOS, You can set a quick double-click to show or hide the IOS Virtual keyboard.



Enable*



Disable

Automatic Sensing Mode

- ① Suitable for 1D barcode scanner



Sense mode




Trigger Mode

- ② Suitable for 2D barcode scanner



Sense mode

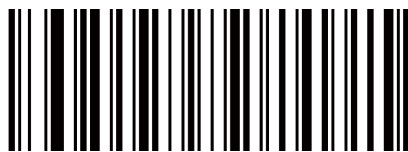

Trigger Mode

Suffix Settings



Add CR*



Add LF



Add CR+LF



Add Tab (HT)



NONE

Vibration Setting(optional)



Enable*



Disable

Sound Settings



High*



Low




Disable

Sleep Time Settings



1 Minute

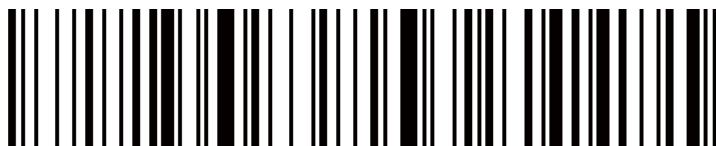

5 Minutes*



30 Minutes



Never Sleep



Sleep Now (Power Off)

Keyboard Language Settings



American English*



German



French



Spanish



Italian



Japanese



Portuguese



British English



Brazilian Portuguese



Russian



International Keyboard

Indicator light

Indicator status	Description
Charging	Red light and blue light
Successful reading	Blue light blink once
Power on state	Blue light keep on
Wireless disconnect	Twice blinks
Bluetooth pairing mode	Blue light flashing

Buzzer

Indicator status	Description
Three short tones	Transfer failed or the storage is full
Five short tones	Out of battery
A short tone	Read successful or wireless connection is successful
Two short tones	Wireless disconnection

Warranty:

For any product which has quality problems:

- 0-30 days after the date of purchase : 30-day money-back guarantee. Just return the intact and undamaged package then you will receive a fully refund (excluding shipping cost).
- 13 months manufacturer's warranty. Warranty time starts from the day sending the parcel.

Within the warranty time:

- 1.RTscan provides free repair or replacement with both sides shipping cost and Chinese side tariff paid by RTscan.
- 2.For man-made damage , RTscan provides repair with all costs paid by the customer.



RTscan Technology Limited | Website: www.rtscan.com

Tel: +86 755 23762089 | E-mail: sales@rtscan.net

Technical Support: support@rtscan.net